



# ARGILLA



## Argilla

The “ARGILLA” collection that celebrates the effect of resin and concrete with a slight sheen. This exciting new collection is an interesting option for architects and interior designers.



*Lead the scene, keep it green*


















1200x2780mm  
1600x1600mm  
1200x1200mm  
600x200mm  
800x800mm  
400x800mm  
200x800mm  
600x600mm  
300x600mm  
450x450mm

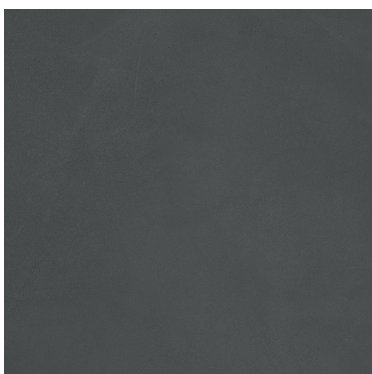

#### Thicknesses

6mm  
9mm  
20mm

#### Finshes

Matt R9  
Natural R10  
Textured R11



● Thickness 6mm/9mm  
● Slip Rating R10/R11  
● Water Absption 0.5%

● Frost Resistance Resistant  
● Chemical Resistance Resistant  
● Material Porcelain



BLUE PRINT  
CERAMICS





1200x2780mm  
1600x1600mm  
1200x1200mm  
600x200mm  
800x800mm  
400x800mm  
200x800mm  
600x600mm  
300x600mm  
450x450mm



Thicknesses  
6mm  
9mm  
20mm

Finshes  
Matt R9  
Natural R10  
Textured R11



● Thickness	6mm/9.5mm	● Frost Resistance	Resistant
● Slip Rating	R10/R11	● Chemical Resistance	Resistant
● Water Absorption	0.5%	● Material	Porcelain



**BLUE PRINT  
CERAMICS**



**STANDARD EN 14411 - G**

















**CARATTERISTICHE TECNICHE**  
TECHNICAL DATA  
TECHNISCHE DATEN  
CARACTERISTIQUES TECHNIQUES  
CARACTERÍSTICAS TÉCNICAS  
ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ  
技术特征

**NORMA**  
STANDARD  
NORM  
NORME  
NORMA  
ЗНАЧЕНИЯ  
标准

**VALORI PRESCRITTI DALLE NORME EN 14411 - G**  
INTERNATIONAL STANDARDS EN 14411 - G  
INTERNATIONALE NORMWERTE EN 14411 - G  
VALEURS PREVUES PAR LES NORMES EN 14411 - G  
VALORES PREVISTOS POR LAS NORMAS EN 14411 - G  
ПРЕДПОСМОТРЕНЫЕ СТАНДАРТОМ EN 14411-G  
EN 14411 - G标准规定值

**\*VALORE MEDIO MIRAGE**  
MIRAGE AVERAGE VALUE  
MIRAGE MITTELWERT  
VALEURS MOYEN MIRAGE  
VALOR MEDIO MIRAGE  
СРЕДНЕЕ ЗНАЧЕНИЕ MIRAGE  
MIRAGE平均值

**CARATTERISTICHE DIMENSIONALI** - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN  
DETERMINATION DES CARACTERISTIQUES DIMENSIONNELLES -  
CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ - 尺寸特征

	<b>LATI</b> SIDES - SEITEN COTES - CANTOS РАЗМЕРЫ СТОРОН - 侧边	EN ISO 10545-2	± 0,3% MAX (± 1,0 mm MAX)	CONFORME COMPLYING		
	<b>SPESORE</b> THICKNESS - DICKE EPAISSEUR - ESPESOR ТОЛЩИНА - 厚度	EN ISO 10545-2	± 5,0% MAX (± 0,5 mm MAX)	CONFORME COMPLYING		
	<b>RETTILINEITÀ DEGLI SPIGOLI</b> STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN RECTITUDE DES ARETES - RECTITUD DE LOS CANTOS КОСОУГОЛЬНОСТЬ - 边角平直度	EN ISO 10545-2	± 0,3% MAX (± 0,8 mm MAX)	CONFORME COMPLYING		
	<b>ORTOGONALITÀ</b> RECTANGULARITY - RECHTWINKLIGKEIT PERPENDICULARITÉ - ORTOGONALIDAD КРИВИЗНА СТОРОН - 直角度	EN ISO 10545-2	± 0,3% MAX (± 1,5 mm MAX)	CONFORME COMPLYING		
	<b>PLANARITÀ</b> SURFACE FLATNESS - EBENFLÄCHIGKEIT PLANEITE DE SURFACE - PLANEIDAD КРИВИЗНА ЛИЦЕВОЙ ПОВЕРХНОСТИ - 平整度	EN ISO 10545-2	± 0,4% MAX (± 1,8 mm MAX)	CONFORME COMPLYING		
	<b>ASSORBIMENTO D'ACQUA</b> WATER ABSORPTION - WASSERAUFNAHME ABSORPTION D'EAU - ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ - 吸水率	EN ISO 10545-3	≤ 0,5%	≤ 0,1%		
	<b>RESISTENZA ALLA FLESSIONE</b> FLEXION RESISTANCE - BIEGESTÄRKEIT RESISTENCIA A LA FLEXION - RESISTENCIA A LA FLEXIÓN ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ - 抗弯强度	EN ISO 10545-4	S ≥ 700 N (< 7,5 mm) S ≥ 1.300 N (> 7,5 mm) R ≥ 35 N/mm²	≥ 6 mm: S ≥ 1100 N R ≥ 48 N/mm² ≥ 9 mm: S ≥ 2.400 N R ≥ 48 N/mm² ≥ 20 mm: S ≥ 12.500 N R ≥ 48 N/mm²		
	<b>RESISTENZA ALL'URTO</b> IMPACT RESISTANCE - STOSSFESTIGKEIT RESISTANCE AUX CHOCS - RESISTENCIA A LOS GOLPES УДАРНОСТОЙКОСТЬ - 抗冲击强度	EN ISO 10545-5	VALORE DICHIARATO DECLARED VALUE	> 0,80		
	<b>RESISTENZA ALL'ABRASIONE</b> ABRASION RESISTANCE - ABRIEFESTIGKEIT RESISTANCE A L'ABRASION - RESISTENCIA A LA ABRASIÓN СТОЙКОСТЬ К ИСТИРАНИЮ - 耐磨强度	EN ISO 10545-6	≤ 175 mm³	< 150 mm³		
	<b>COEFFICIENTE DI DILATAZIONE TERMICA LINEARE</b> COEFFICIENT OF LINEAR THERMAL EXPANSION - LINEAR WÄRMEAUDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATATION THERMIQUE LINEAIRE - COEFFICIENTE DE DILATACIÓN TÉRMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСШИРЕНИЯ - 线性热膨胀系数	EN ISO 10545-8	—	α=6,6x10 <sup>-6</sup> °C <sup>-1</sup>		
	<b>RESISTENZA AGLI SBALZI TERMICI</b> RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOCS THERMIQUES - RESISTENCIA A LOS CHOQUES TÉRMICOS СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ - 耐热突变性	EN ISO 10545-9	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE		
	<b>RESISTENZA AL GELO</b> FROST RESISTANCE - FROSTBESTÄNDIGKEIT RESISTANCE AU GEL - RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ - 耐冻性	EN ISO 10545-12	TEST SUPERATO SECONDO EN ISO 10545-1 PASS ACCORDING EN ISO 10545-1	NESSUN DANNO NO DAMAGE		
	<b>RESISTENZA ALL'ATTACCO CHIMICO</b> RESISTANCE TO CHEMICALS - CHEMIKALIENBESTÄNDIGKEIT RESISTENCIA A L'ATTAQUE CHIMIQUE - RESISTENCIA A LAS MANCHAS ХИМИЧЕСКАЯ СТОЙКОСТЬ - 耐化学品作用	EN ISO 10545-13	B MIN.	A LA HA		
	<b>RESISTENZA ALLE MACCHIE</b> RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ - 防污性	EN ISO 10545-14	VALORE DICHIARATO DECLARED VALUE	5		
	<b>CESSIONE DI PIOMBO E CADMIO</b> LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM PERTE DE PLOMB ET CADMIUM - CESIÓN DE PLOMO Y CADMIO ВЫДЕЛЕНИЕ СВИНЦА И КАДМИЯ - 铅和镉的排放	EN ISO 10545-15	VALORE DICHIARATO DECLARED VALUE	< AL LIMITE DI RILEVAMENTO < THAN INSTRUMENT LIMIT		
	<b>SCIVOLOSITÀ</b> SKID RESISTANCE - RUTSCHWERT GLISSANCE - ADHERENCIA СКОЛЬЗКОСТЬ - 防滑性	DM 236/89 BCRA	> 0,40	SP	NAT	ST 20mm
		ASTM C1028	Wet SCOF > 0,60			
		ANSI A137.1	Wet DCOF > 0,42			
		AS 4586:2013	-			
		DIN 51130	-	R9	R10	R11
		DIN 51097	-		A+B	A+B+C
		ENV 12633	≥ CL1			
		UNI EN 19036 - 42001	≥ 36			

Per i certificati specifici, contattare Mirage SpA - For specific certificates, please contact Mirage SpA - Für die speziellen Zertifikate wenden Sie sich bitte an Mirage SpA - Pour les certificats spécifiques, veuillez contacter Mirage SpA  
Para los certificados específicos, contactar Mirage SpA - Для сертификатов обращайтесь в компанию Mirage SpA - 关于具体的证书, 请联系Mirage Spa公司

ARGILLA



- Thickness 6mm/9.5mm
- Slip Rating R10/R11
- Water Absorption 0.5%
- Frost Resistance Resistant
- Chemical Resistance Resistant
- Material Porcelain





*Lead the scene, keep it green*

